



RUIYIN ONEPASS EP i3200

RUIYIN ONEPASS EP i3200 is a proof / photo printer.

This document provides information on how to drive the printers from Fiery XF.

Installation requirement:

- Fiery XF 9.0.1
- Fiery Command WorkStation 7.2 or higher

Supported printers

The following drivers exist:


Printer model
ONEPASS EP i3200

License

RUIYIN ONEPASS EP i3200 is supported by Printer Option Group 6 license.

Setting up the printer in Fiery XF: Driver supports both IP and File output connection types.


1. Set up the export path in Server Manager to generate a *.prn file which you can load into the RUIYIN Printer software.

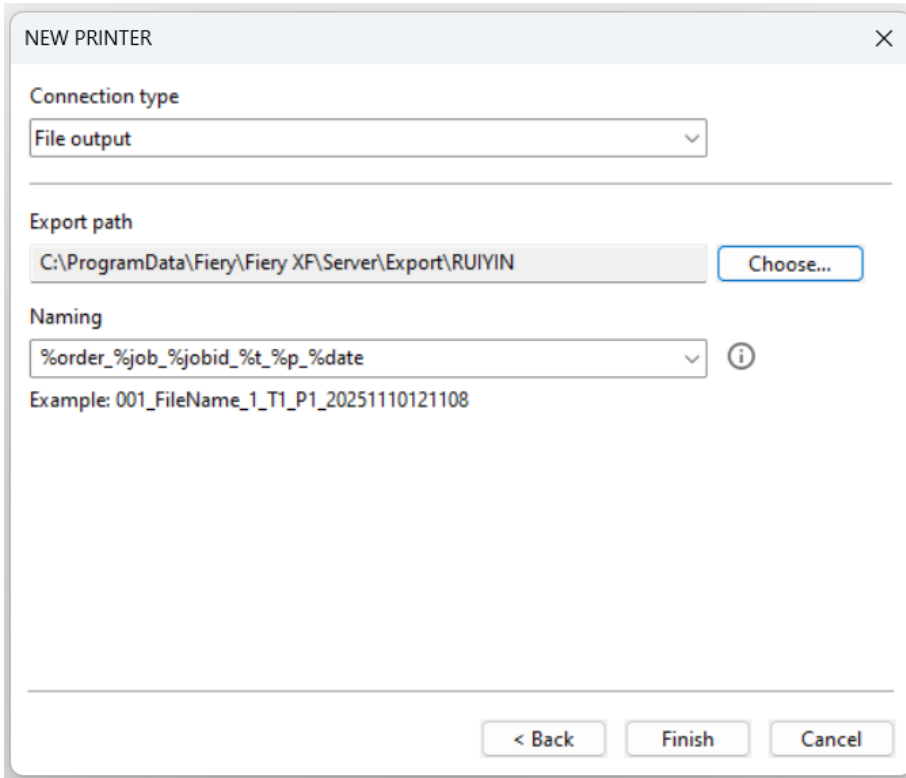

The screenshot shows the 'NEW PRINTER' dialog box with the following settings:

- Connection type:** File output
- Export path:** C:\ProgramData\Fiery\Fiery XF\Server\Export\RUIYIN (with a 'Choose...' button)
- Naming:** %order_%job_%jobid_%t_%p_%date (with an information icon and an example: 001_FileName_1_T1_P1_20251110121108)
- Buttons:** < Back, Finish, Cancel

2. Set up the Ip address of printer in Server Manager to send print data directly to printer.

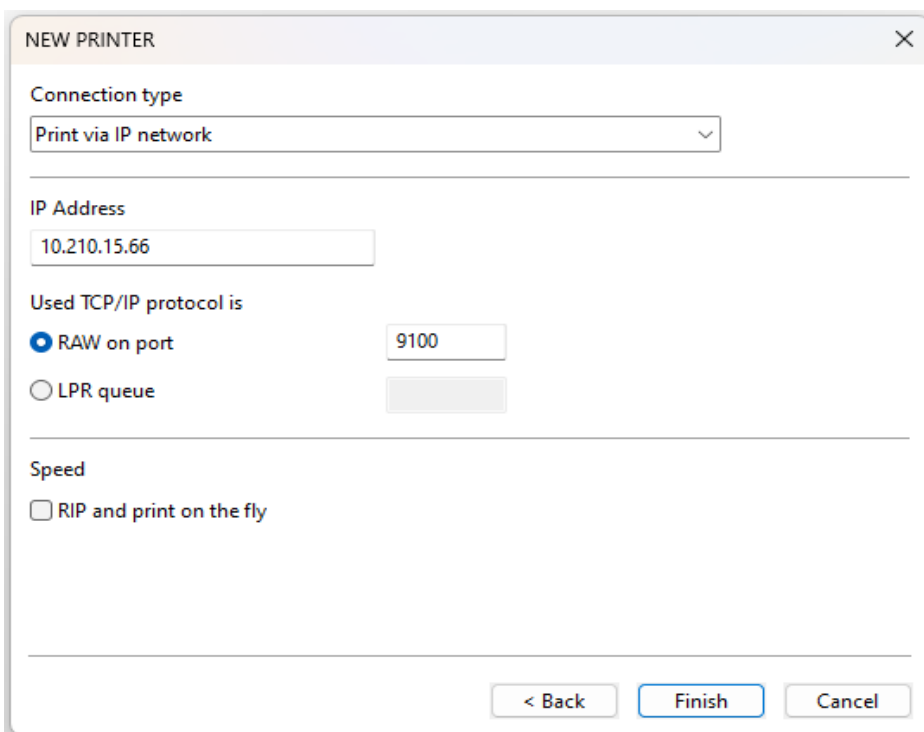

The screenshot shows the 'NEW PRINTER' dialog box with the following settings:

- Connection type:** Print via IP network
- IP Address:** 10.210.15.66
- Used TCP/IP protocol is:** RAW on port (9100) and LPR queue
- Speed:** RIP and print on the fly
- Buttons:** < Back, Finish, Cancel

Settings

Resolutions

The driver offers mentioned resolutions.


600 x 510

Print modes

The driver offers 1 pass print mode.

Dot sizes

Dot size:

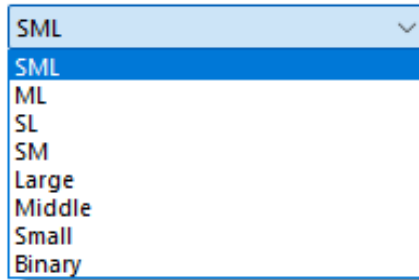

S, M, L stands for Small, Middle, Large dot.
Binary options use One bit Per Pixel.

Dot Size	Purpose
SML	Lowest resolution or high ink medium
ML	Higher head distance
SL	Anti-banding measure
SM	Middle resolution
Large	Highest head distance
Middle	Higher head distance, middle resolution
Small	High resolution
Binary	Similar to Middle, Data format is 1 bit per pixel.

Color Modes

The driver offers CMYK color mode with advanced Linearization.