



iTTEN

iTTEN printers are proof / production printers.

This document provides information on how to drive the printers from Fiery XF.

Installation requirement:

- Fiery XF 9.0.2
- Fiery Command WorkStation 7.2 or higher

Supported printers

The following drivers exist:

Printer model	Color Modes
iTTEN-KYE-Hoson	KCMY, KCMYLcLm, KCMYBGO
iTTEN-AT	YMCK, YMCKLcLm, YMCKLcLmLkLLk, YMCKLkOGV
iTTEN-Hoson	KCMY, KCMYLcLm, KCMYLcLmLkLLk, KCMYLkOGV

License

iTTEN models are supported by Printer Option Group 6 license.


Supported Max Width: 3200mm

Connection Type: IP Network/File Output.

Settings:


Setting up the printer in Fiery XF:

1. Set up the export path in Server Manager to generate a *.prn file which you can load into the iT TEN Printer software.

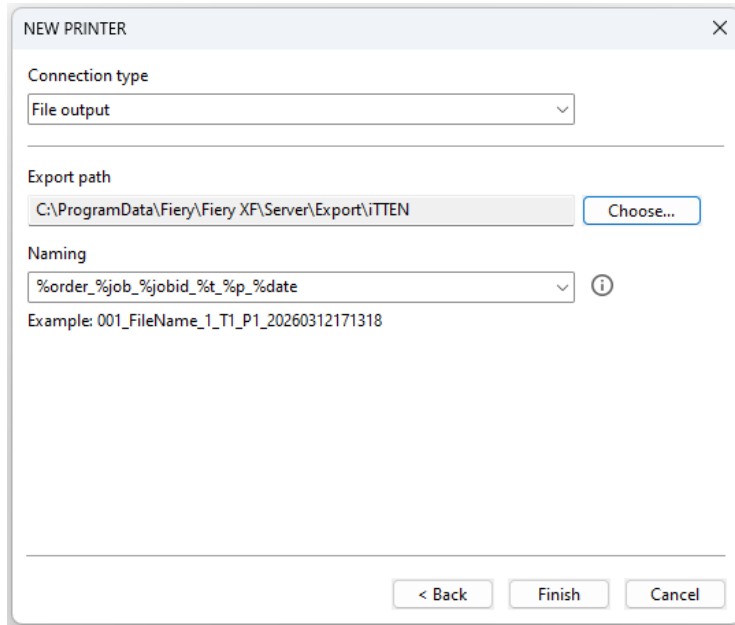

The 'NEW PRINTER' dialog box is shown with the 'Connection type' set to 'File output'. The 'Export path' is 'C:\ProgramData\Fiery\Fiery XF\Server\Export\iT TEN', with a 'Choose...' button next to it. The 'Naming' dropdown is set to '%order_%job_%jobid_%t_%p_%date', with an information icon and an example path 'Example: 001_FileName_1_T1_P1_20260312171318' below it. At the bottom are '< Back', 'Finish', and 'Cancel' buttons.

2. Set up the IP address in Server Manager to connect to printer.

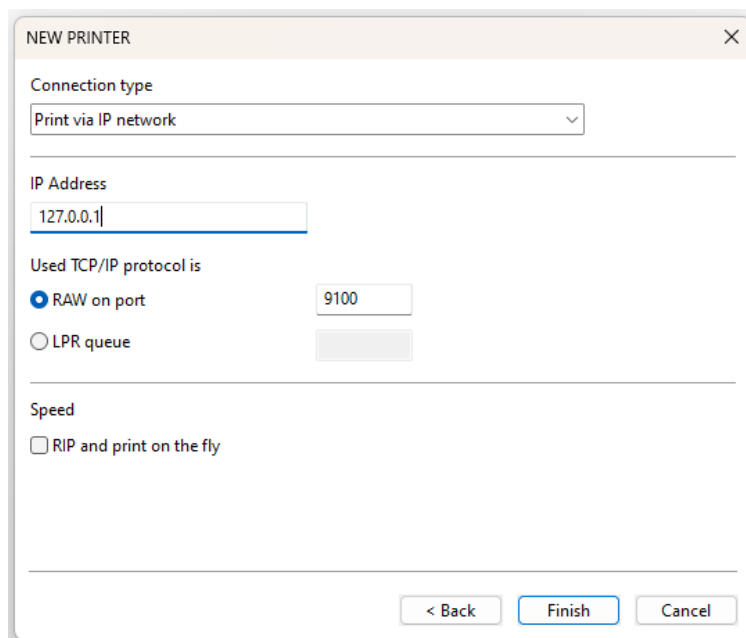

The 'NEW PRINTER' dialog box is shown with the 'Connection type' set to 'Print via IP network'. The 'IP Address' field contains '127.0.0.1'. Under 'Used TCP/IP protocol is', the 'RAW on port' radio button is selected with a port number of '9100', and the 'LPR queue' radio button is unselected. The 'Speed' section has an unchecked 'RIP and print on the fly' checkbox. At the bottom are '< Back', 'Finish', and 'Cancel' buttons.

Settings

Resolutions

iTTEN-KYE-Hoson driver offers below mentioned resolutions:

300x600, 600x600, 900x600, 600x1200, 900x1200, 1200x1200, 450x600, 1350x600, 1350x1200, 1800x1200, 1200x600, 1800x600, 2400x1200, 720x600, 1440x600, 720x1800, 1440x1200, 1440x1800, 1440x2400

iTTEN-AT and iTTEN-Hoson drivers offers below mentioned resolutions:


360x600, 360x1200, 720x600, 360x1800, 720x1200, 720x2400, 1080x1200, 1440x1200, 1440x1800, 1440x2400, 300x600, 300x1200, 600x600, 300x1800, 600x1200, 600x2400, 900x1200, 1200x1200, 1200x1800, 1200x2400, 240x1800, 240x1200, 480x1200, 480x1800, 480x3600, 480x2400, 720x3600, 720x1800, 960x1200, 960x1800, 960x2400

Print modes

The driver offers **Standard** print mode.

Dot sizes

Dot size:

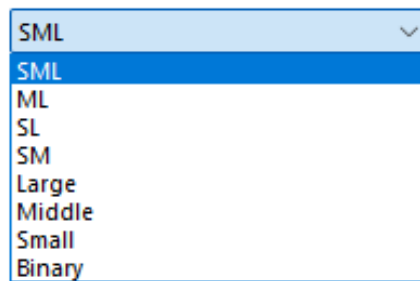

S, M, L stands for Small, Middle, Large dot.

Binary options use One bit Per Pixel.

Dot Size	Purpose
SML	Lowest resolution or high ink medium
ML	Higher head distance
SL	Anti-banding measure
SM	Middle resolution
Large	Highest head distance
Middle	Higher head distance, middle resolution
Small	High resolution
Binary	Similar to Middle, Data format is 1 bit per pixel.