



EPSON SureColor SC-F9300/F9400 Series Contone Driver

This document describes the supported features and options of the EPSON SureColor SC-F9300/F9400 Series contone driver for Fiery XF.

Starting with Fiery XF 7.2.3, the integration with Epson Edge Dashboard has changed.

Starting with Fiery XF 7.3.3, SC-F9400 Series driver has been added.

Supported printers

EPSON SC-F9300 series:

- EPSON SC-F9300 (Europe, America, Former republics of the Soviet Union)
- EPSON SC-F9330 (Indonesia, Malaysia, Philippines, Singapore, Thailand, Vietnam, Pakistan, Myanmar, Cambodia, India, Bangladesh, Sri Lanka, Nepal, Republic of Maldives, Taiwan)
- EPSON SC-F9340 (Korea)
- EPSON SC-F9350 (Japan)
- EPSON SC-F9360 (Australia, New Zealand)
- EPSON SC-F9370 (USA, Canada, Central & South America)
- EPSON SC-F9380 (China, Hong Kong)

EPSON SC-F9400 series:

- EPSON SC-F9400 (Europe, America, Former republics of the Soviet Union)
- EPSON SC-F9430 (Indonesia, Malaysia, Philippines, Singapore, Thailand, Vietnam, Pakistan, Myanmar, Cambodia, India, Bangladesh, Sri Lanka, Nepal, Republic of Maldives, Taiwan)
- EPSON SC-F9440 (Korea)
- EPSON SC-F9450 (Japan)
- EPSON SC-F9460 (Australia, New Zealand)
- EPSON SC-F9470 (USA, Canada, Central & South America)
- EPSON SC-F9480 (China, Hong Kong)

Supported OS

- Windows 64

License

You require a license for the Printer Option Group 6

Technical specifications

Item	SureColor SC-F9300 SureColor SC-F9400
Print head	Precision core TFP print head (1440 Nozzles / ink)
Printer width	64 inches
Ink set	EPSON UltraChrome DS Ink CMYK
Print resolution	360 x 720dpi 720 x 720dpi 720 x 1440dpi
Custom paper #	Custom paper: #1-30
Custom paper setting	Epson Edge Dashboard software manages custom paper settings.
Auto adjustment	PF, bi-d adjustment

Connection

100Base-TX, 1000Base-T. Print via TCP port 9100

Color mode

- CMYK

Media source

- Roll

Preparation

Before you can use the Epson SureColor printer in the EFI RIP software, you must first install and set up Epson Edge Dashboard. Go to www.epson.sn to download and install the latest printer driver and Epson Edge Dashboard.

After installing the software, register your printer using the Epson Edge Dashboard. For more information on printer registration, see the Epson documentation.

If everything is set up correctly it should look like this:

The screenshot displays the Epson Edge Dashboard interface for an SC-F9400H Series printer. The interface is organized into several sections:

- Druckerstatus:** Shows the printer is **Bereit** (Ready).
- Medieneinstellungen:** Displays the current media settings for a job named **[#3] DS_Multi-Purpose_F**. The settings include a width of **1110 mm**, a remaining length of **77.2 m**, a roller gap of **2.0**, and a print length of **0.1 m**. A **Löschen** (Delete) button is available for the print length.
- Geschätzter Tintenstand und Status der Chip-Einheit:** Shows the estimated ink levels and chip unit status for various ink colors (FY, HDK, Y, M, C, FPE, HDK, Y, M, C). Each color has a corresponding icon with a warning symbol.
- Abfalltintenflasche:** Shows the waste ink bottle level.
- Wischereinheit:** Shows the wiper unit level.
- Heizertemperatur:** Shows the heater temperature at **40 c**.
- Druckkopfreinigung:** Shows the remaining time for the print head cleaning cycle.
- Versionsinformation:** Displays the serial number **X6ZSA10004** and the firmware version **MU026L5.1.14**.

At the bottom of the dashboard, there are several action buttons: **Düsenprüfmuster drucken**, **Druckkopfreinigung**, **Vorheizen starten**, and **Erweiterte Medieneinstellung**.


The next step is to download the media settings. You can do this by clicking Media Settings in Epson Edge Dashboard:

Once you have the media settings in the Source (Local Media Library), the next step is to send the data from the Source (Local Media Library) to the Target (the printer).

You can perform the following operations from this screen:

- Download print setting files (EMX files) provided by Epson
- Register media settings in the EMX file to the printer
- Edit parameters

For more detailed information, see the documentation provided by Epson.

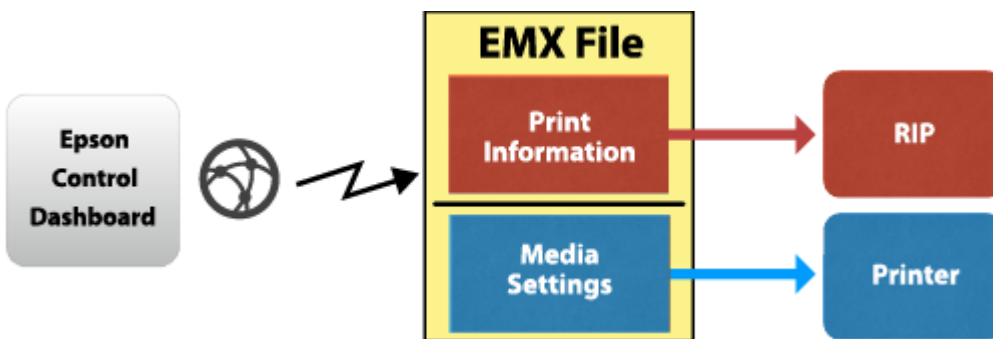

After the media are registered in the printer, the system is ready to use with the EFI RIP software.

Integration into Fiery XF

Initially, no media list is available in Fiery XF, even though a local media library is displayed on the Epson Edge Dashboard.

Media list from printer

To transfer the media list to Fiery XF, set up the output device in Fiery XF for the appropriate printer model, including the IP address. As soon as you save your settings, all the available media information and ICC profiles from the Target (printer) list are downloaded using Epson Edge Dashboard.

Next, Fiery XF creates EPL files for each media registered in the printer. This process can take some time, and depends very much on your PC. Wait at least one minute before checking the media list. If the list does not appear, restart the Fiery XF server.

Media List from EMX file

Alternatively, you can drop an EMX file into this folder:

C:\ProgramData\EFI\EFI XF\Server\Temp\EpsonEmxHotfolder

Like for the printer, media information and ICC files will be downloaded from the Dashboard and EPL files will be created.


This is useful if another Dashboard is already connected to the printer but that Dashboard is not accessible. It works even without a Comm driver. The function is introduced in Fierx XF 7.2.3

No Media List at all

This workflow is not supported. Connection to Epson Edge Dashboard is a must and there must be at least one media type and its generated EPL files.

The screenshot below shows an example how registered media types for a SureColor F9300/F9400 are displayed in Fiery XF:

Media name

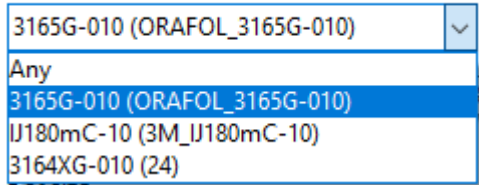


The last entry is from Custom Paper Setting 24 of the printer. This number appears in the main screen on the printer’s control panel. The name is the same as shown on the printer’s control panel media menu. The other entries are from EMX files. In that case the file name minus the initial “S40 “ is shown in parentheses.


You can now select one of the downloaded, registered media. Depending on the selected media, multiple EPLs may be available. You can see if it is from the printer...

... or from an EMX file:

Resulting Calibration(s)

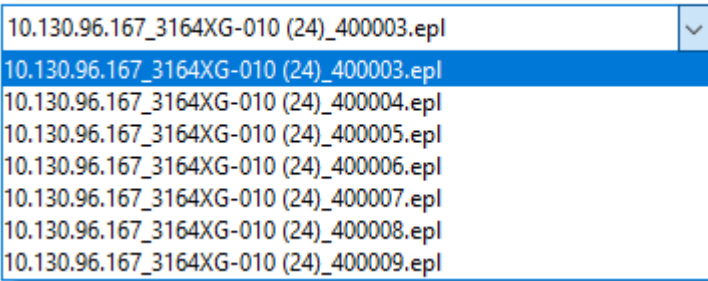


Resulting Calibration(s)

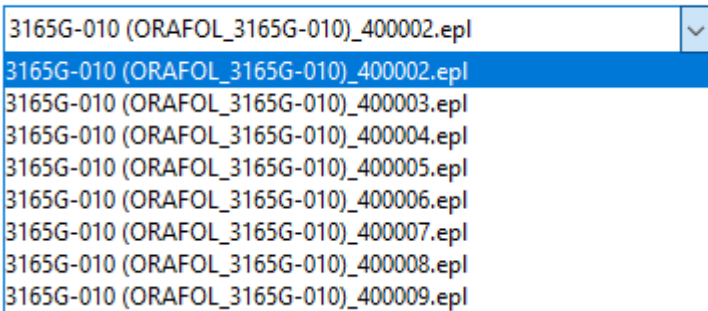


The Print mode list box shows the print modes by name:

Print mode

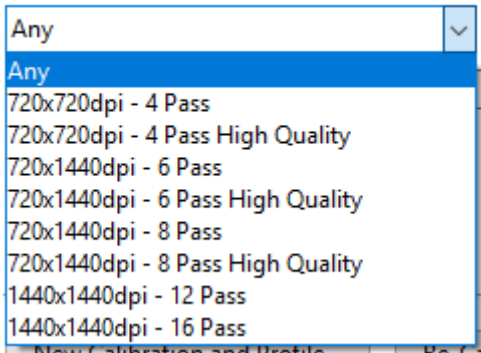

Every EPL represents a different combination of printer resolution and print quality, such as illustrated in the screenshots below:

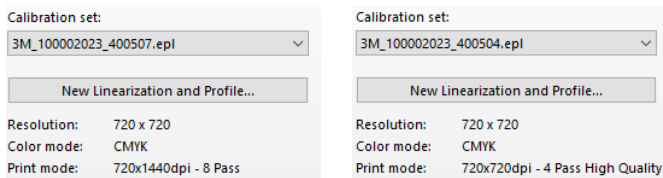

Note: There is no need to repeat the procedure for additional media downloaded through Epson Edge Dashboard. You just need to make sure that the downloaded media is registered properly at the Epson printer itself using Epson Edge Dashboard.

Printing

The User's guide asks you to choose the media setting number once you have loaded the media. In our example above it would be setting 24. This setting will be used. The Fiery XF driver will NOT change the media setting number of the printer (as opposed to versions of Fiery XF prior to 7.2.3).

Then choose a matching media type in Fiery XF:

- If you have registered the EMX on the printer, choose the media type which has the number in parentheses, e.g. "3164XG-010 (24)"
- If you have just the EMX file, choose the media type which should be most close to what is on the printer, e.g. "3165G-010 (ORAFOL_3165G-010)"

Mirror

This checkmark activates horizontal mirroring of the print data. The mirroring is applied to the whole print data, including footer and marks.

Wait for print completion

This checkmark controls the behavior after print data transfer: If enabled, the driver will wait until printer status becomes printed or error.

Availability depends on license **XF Job print status option**.

FAQ

Question	Answer
Can I use Fiery XF without Epson Edge Dashboard	Not entirely without. Epson Edge Dashboard must be either installed on the same computer or accessible in the same network (exactly one installation)
Can I use EMX files	Yes of course
Can I take a generated EPL and create my own ICC profile?	Yes, if you have media types populated from Dashboard.
Can I create an EPL in Color Tools and create my own ICC profile?	<p>Yes, if</p> <ul style="list-style-type: none"> • You have chosen an EPL for the same media type in System Manager. Ink density from that EPL will go into your new EPL. • You see a list of media types in Color Tools. If you don't see media types, they are not yet populated from Dashboard. • You choose the media type from that list. <p>The EPL from Color Tools will fail if it does not have a media type from Dashboard.</p>
If the media setting on the printer was created only at the printer (using Easy Media Setup), not by Dashboard: Can I create an EPL in Color Tools and create my own ICC profile,?	No. This is not supported. Media type is required. You can create the EPL based on EMX for similar media and print.
Can I take my calibration sets to another Fiery XF?	<p>Not directly.</p> <p>Export the EMX file and media settings and register those on the other printer. Then you will get calibration sets with same content and have your settings on the printer.</p> <p>Once that is established, you can also use calibration sets you created yourself.</p>

Media types

The following section lists all the available generic media types.

Note: The EPLs created from the files downloaded through Epson Edge Dashboard do not always support all the combinations listed below.

Media type	Resolution and print quality
Paper Fabric	360x720 dpi (1 Pass draft) 360x720 dpi (1 Pass) 360x720 dpi (2 Pass) 360x720 dpi (3 Pass) 720x720 dpi (2 Pass Speed) 720x720 dpi (2 Pass) 720x720 dpi (3 Pass) 720x720 dpi (4 Pass) 720x720 dpi (4 Pass HQ) 720x720 dpi (5 Pass) 720x720 dpi (5 Pass HQ) 720x1440dpi (6 Pass) 720x1440dpi (6 Pass HQ) 720x1440dpi (8 Pass) 720x1440dpi (8 Pass HQ)
Paper Rigid	720x1440dpi (6 Pass) 720x1440dpi (8 Pass) HQ