



EPSON SureColor T5600D, EPSON SureColor T5600DM and T7600D Series CT/RGB Driver

This document describes the supported features and options of the EPSON SureColor T56x0D, EPSON SureColor T56x0DM and EPSON SureColor T76x0D printer drivers for Fiery XF

System Requirements

The following overview informs you about the **minimum** required Fiery XF server for full support of this printer.

Fiery XF Server
Fiery XF 8.0.5

Supported Printer

- I. **EPSON SC-T56x0D** (appearance in Fiery XF) supports:
6 color, 44 inch width
 - EPSON SC-T5680D (China)
- II. **EPSON SC-T56x0DM** (appearance in Fiery XF) supports:
6 color, 44 inch width
 - EPSON SC-T5680DM (China)
- III. **EPSON SC-T76x0D** (appearance in Fiery XF) supports:
6 color, 44 inch width
 - EPSON SC-T7680D (China)

Specification Summary

Item	SC-T56x0 and SC-T76x0
Printer width	44 inches
Ink set	Epson Aqueous ink - C/M/Y/K/Lc/Lm
Media type	Roll paper, Cut sheet, Board paper
Paper path	Manual feed, Roll feed
Paper Width	Paper width: 254-1118 mm (Roll), 203.2-1118 mm (Sheet), 203.2-1118 mm (Board)
Paper Thickness:	0.07-0.8 mm (Roll), 0.07-0.8mm (Sheet), 0.8-1.5 mm (Board) Core diameter: 2 inches (3" supported with an option) Max. roll paper diameter: 170mm

Roll spindle	Spindle used, 2,3 in. core (3" supported with an option)
Borderless print	Supported
EMX	Supported
I/F	USB: USB3.0 Wired LAN: 10Base-T/100Base-TX/1000Base-T Wireless LAN: IEEE 802.11a/b/g/n/ac
HDD/SSD unit	Not supported
SpectroProofer	Not available

Color Mode

- CMYK
- RGB

Ink Configuration

- EPSON Aqueous ink

Supported Options (Valid for all printer of this supplement)

- Print direction
 - Uni-directional
 - Bi-directional
- Auto cut
 - Autocut On
 - Autocut Off
 - Print horizontal line.
- Borderless
 - On
 - Off
- Paper Edge Quality
 - Standard
 - Add Top Margin
 - Optimize Media Edge Print Quality
- Ink density adjustment
 - Range is 12% .. 400%
 - Default value is 100% (no adjustment)
 - Each time you choose a calibration in Server Manager or Job Editor, the adjustment value will be set from the calibration's EPL. Older EPL files which do not have density value will set the default value to 100%.

Handling of Dual Roll

- Models that include "D" in their Device are equipped with dual roll. The 1st (upper) Roll can be used as both a paper feeder and a take-up reel, and its setting can only be made on the printer control panel.
- In some cases, even if you select Roll 1 in Fiery XF, printing may result in error. Refer to following table for such scenarios –

State of the 1st Roll on printer control panel	Selected Roll in Fiery XF	Description
Paper feeder	Roll 1	Printing is executed on Roll Paper 1.

	Roll 2	Printing is executed on Roll Paper 2.
	Automatic	Printing is executed on more suitable Roll Paper.
Take-up reel	Roll 1	Printing will result in an error.
	Roll 2	Printing is executed on Roll Paper 2.
	Automatic	Printing is executed on Roll Paper 2.

Supported Resolutions and Print Modes

Media Name	Black Ink	Quality name	Rip resolution	Print resolution
Premium Glossy Photo Paper (250)	Photo	Quality	300/600	1200*1200
		High Quality	300/600	1200*1200
Premium Glossy Photo Paper (170)	Photo	Quality	300/600	1200*1200
		High Quality	300/600	1200*1200

RIP Resolution:

300/600 = 300 x 300 / 600 x 600

Paper Edge Quality Constraints

Paper Edge Quality has following 3 options –

- Paper Edge Quality
 - Standard
 - Add Top Margin
 - Optimize Media Edge Print Quality


EMX/Epson Edge Dashboard Support

Registering the Media Types in Printer using Epson Edge Dashboard

Before you can use the Epson SureColor printer in the Fiery XF RIP software, you must first install and set up Epson Printer Driver, Epson Media Installer and Epson Edge Dashboard.


After installing the software, register your printer using the Epson Edge Dashboard. For more information on printer registration, see the Epson documentation.

If everything is set up correctly it should look like this:

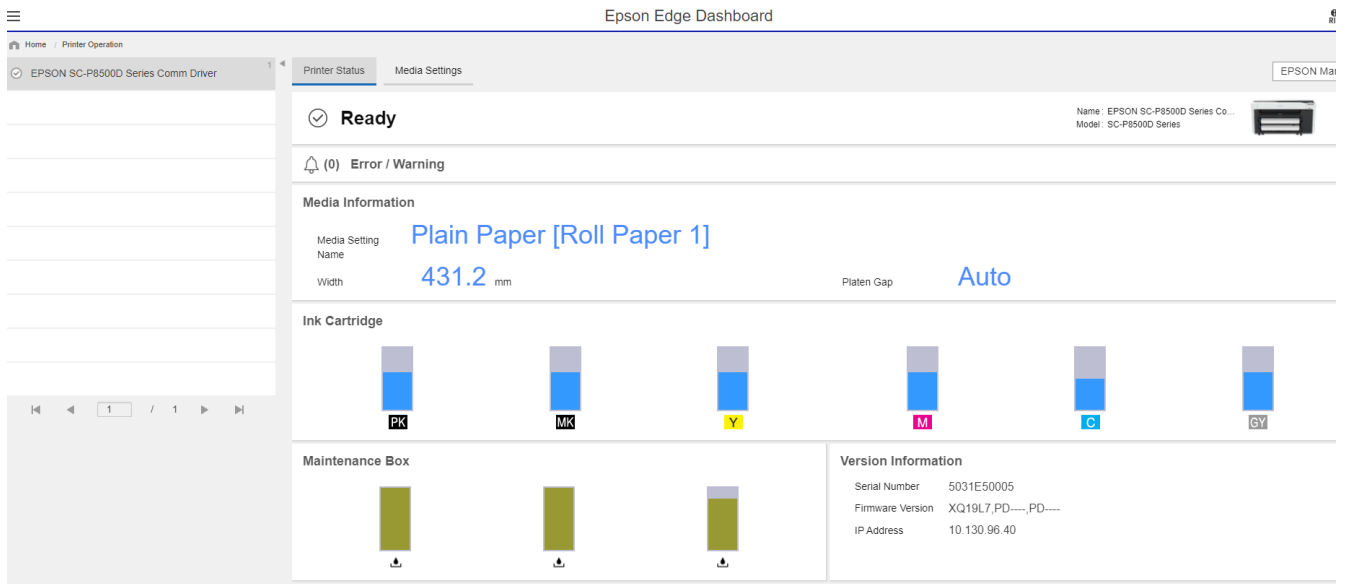


The next step is to download the media settings. You can do this by clicking Media Settings in Epson Edge Dashboard and then launching Epson Media Installer

You can then select the Media Settings and Download and Register them.

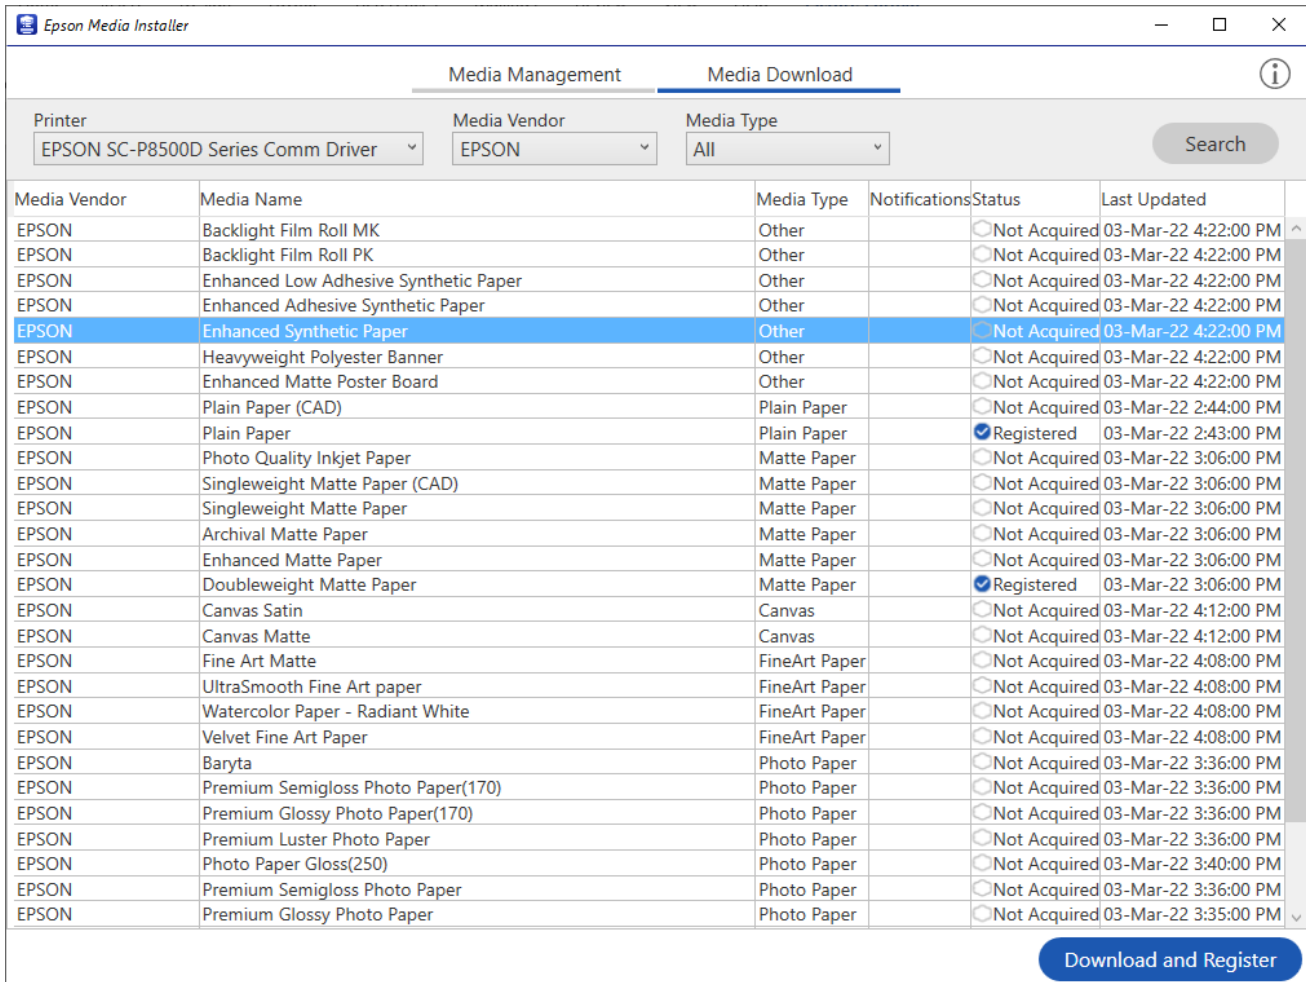

For more detailed information, see the documentation provided by Epson.

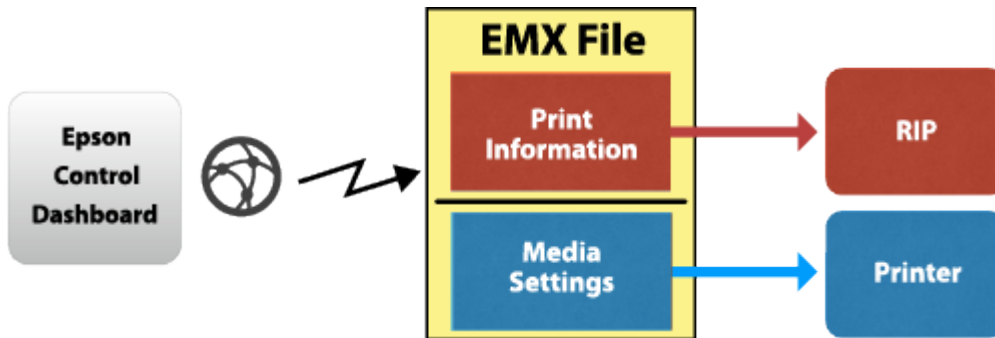

After the media are registered in the printer, the system is ready to use with the Fiery XF RIP software.

Media list from printer

To transfer the media list to Fiery XF, set up the output device in Fiery XF for the appropriate printer model, including the IP address. As soon as you save your settings, all the available media information and ICC profiles from the Target (printer) list are downloaded using Epson Edge Dashboard.

Next, Fiery XF creates EPL files for each media registered in the printer. This process can take some time and depends very much on your PC. Wait at least one minute before checking the profile list. If the list does not appear, restart the Fiery XF server.

Media List from EMX file

Alternatively, you can drop an EMX file into this folder:

```
C:\ProgramData\EFI\EFI XF\Server\Temp\EpsonEmxHotfolder
```

Like for the printer, media information and ICC files will be downloaded from the EMX file and EPL files will be created.

This is useful if another Dashboard is already connected to the printer, but that Dashboard is not accessible. It works even without a Comm driver.

Selecting the Profile for printing

You can now select one of the downloaded, registered media. Depending on the selected media, multiple EPLs may be available. You can see if it is from the printer...

... or from an EMX file:

Resulting Calibration(s)

EPSON_Doubleweight Matte Paper_102000130_1_CMYK.epl

ICC

Epson_SC-P8500D_DoubleweightMattePaper_CMYK_C_600x600.icc

Media type

Doubleweight Matte

C:/ProgramData/EFI/EFI Media Profiles/EPSON/SC-P8500D Series/EPSON_10.130.96.40/Doubleweight Matte Paper/Epson_SC-P8500D_DoubleweightMattePaper_CMYK_C_600x600.icc

Device link profile

--

Print direction

Unidirectional Switch to bidirectional

Visual correction

None

Resulting Calibration(s)

EPSON_Singleweight Matte Paper_102000128_31_CMYK.epl

ICC

Epson_SC-P8500D_SingleweightMattePaper_CMYK_1200x1200.icc

Media type

Singleweight Matte

C:/ProgramData/EFI/EFI Media Profiles/EPSON/SC-P8500D Series/EPSON_Singleweight Matte Paper/Epson_SC-P8500D_SingleweightMattePaper_CMYK_1200x1200.icc

Device link profile

--

Print direction

Bidirectional Switch to unidirectional

Visual correction

None

The Print mode list box shows the print modes by name:

Print mode

- 1200x1200dpi - 6 Pass Photo Color
- Any
- 1200x1200dpi - 6 Pass Photo Color
- 1200x1200dpi - 8 Pass Photo Color
- 1200x1200dpi - 6 Pass Photo Mono
- 1200x1200dpi - 8 Pass Photo Mono
- 1200x1200dpi - 6 Pass Uni Photo Color
- 1200x1200dpi - 8 Pass Uni Photo Color
- 1200x1200dpi - 6 Pass Uni Photo Mono
- 1200x1200dpi - 8 Pass Uni Photo Mono

Every EPL represents a different combination of printer resolution and print quality.

Note: There is no need to repeat the procedure for additional media downloaded through Epson Edge Dashboard. You just need to make sure that the downloaded media is registered properly at the Epson printer itself using Epson Edge Dashboard.

FAQ

Question	Answer
Can I use Fiery XF without Epson Edge Dashboard	Not entirely without. Epson Edge Dashboard must be either installed on the same computer or accessible in the same network (exactly one installation)
Can I use EMX files	Yes

Change History

Version	Date	Description	Updated by	Affected XF Versions
v1.0	21-Nov-24	First Draft	Vachan KC	Fiery XF 8.0.5