



Grando GD-1301, GD-1304

Grando GD-1301, GD-1304 are proof / photo printers using water-based ink.

This document provides information on how to drive the printers from Fiery XF.

Installation requirement:

- Fiery XF 8.0.4
- Fiery Command WorkStation 7.1.0.157 or higher

Supported printers

The following drivers exist:

Printer model
Grando GD-1301
Grando GD-1304

License

All Grando Models are supported by Printer Option Group 4 license

Setting up the printer in Fiery XF

Set up the export path in Server Manager to generate a *.prt file which you can load into the Grando Printer software.

NEW PRINTER

Connection type
File output

Export path
C:\ProgramData\EFI\EFI XF\Server\Export\GrandoGD1301 Choose...

Naming
%order_%job_%jobid_%t_%p_%date ⓘ
Example: 001_FileName_1_T1_P1_20240812172847

< Back Finish Cancel

Settings

Resolutions


The driver offers 720x1200, 720x1800, 720x2400, 720x3600.

Print modes

The driver offers 2,3,4,6,8,12,16,18,24,32,36 pass print modes.

Dot sizes

S, M, L stands for Small, Middle, Large dot.

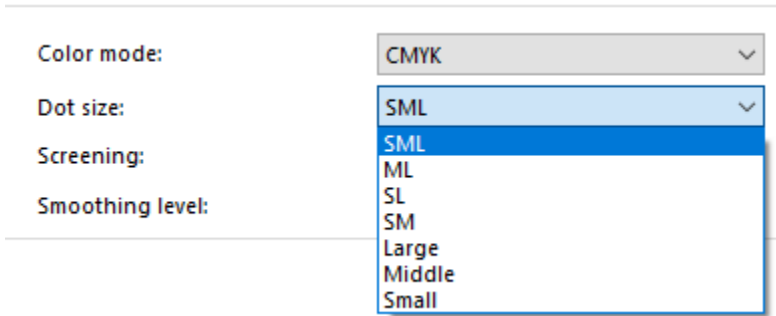

Dot Size	Purpose
SML	Lowest resolution or high ink medium
ML	Higher head distance
SL	Anti-banding measure
SM	Middle resolution
Large	Highest head distance
Middle	Higher head distance, middle resolution
Small	High resolution

Color Modes

The driver offers CMYK, CMYKcmkk, CMYKOGcm. Standard Linearization is used.