



# EFI Pro 30h+

This document provides information on how to drive the EFI Pro 30h+ printer from Fiery XF. It covers the following topics:

- Workflow
- Printers, including setting up in Fiery XF
- Fiery XF settings
- Creating calibration files and media profiles
- Printing with white ink and clear ink
- Special features, including skipping blank space during printing, and media and ink consumption

## Workflow

The following components are required to print to an EFI wide format printer from Fiery XF:

- Fiery XF Server (v. 8.0.5 and higher)  
For more information, contact Fiery XF technical support.
- Printer hardware

## Supported printers

The following EFI Wide Format printers are supported:

Printer model	Description
EFI Pro 30h+ White	6 head CMYKWW hybrid (roll 126 inch x 50m, rigid 126inch x 252 inch)
EFI Pro 30h+ White Varnish	6 head CMYKWCl hybrid (roll 126 inch x 50m, rigid 126inch x 252 inch)
EFI Pro 30h+ Varnish	6 head CMYKClCl hybrid (roll 126 inch x 50m, rigid 126inch x 252 inch)

## License

You require a license for the Printer Option EFI Wide Format.

## Setting up the printer in Fiery XF

Set up the printer in Server Manager to use the **File output** option to generate a \*.bco file which you can load into the EFI Pro 30h+ Printer software.

### File Output on a local folder

The Fiery XF server and Command WorkStation are normally installed on the printer PC. The preferred workflow when printing to the EFI 30h+ printer is the so-called RIP-then-print workflow where the Fiery XF server is configured for file output.

NEW PRINTER

Connection type  
File output

Export path  
E:\Export\Pro30h

Username

Password

Naming  
%order\_%job\_%jobid\_%t\_%p\_%date  
Example: 001\_FileName\_1\_T1\_P1\_20220405171026

< Back Finish Cancel

When set up this way, the Fiery XF server RIPs the job and creates a \*.bco file. Use the printer software to select the \*.bco file and print the job. For more information on how to use the printer software, see the Pro 30h+ Operator's Guide.

### File Output over network

If you run Fiery XF on a separate computer, e.g. EFI proServer, the following is required:

- On the printer computer, setup a share, e.g. `\\computername\EFIPro30hp`. One user must have write access to the share and to the local folder that is shared. Note down the user's credentials (username, password).
- In Fiery XF specify
  - The share `\\computername\EFIPro30hp` as export path
  - The credentials of the user mentioned above


## Fiery XF settings

This section is intended for printer operators who are familiar with Fiery XF.

### Output folder

This folder is the base for the export folder.

The default folder depends on the computer's disk configuration. You can change the folder by stopping the Fiery XF server and then clicking Configuration -> Server File Paths in Fiery Server Control, or in Server Manager at Server > Server File Paths.

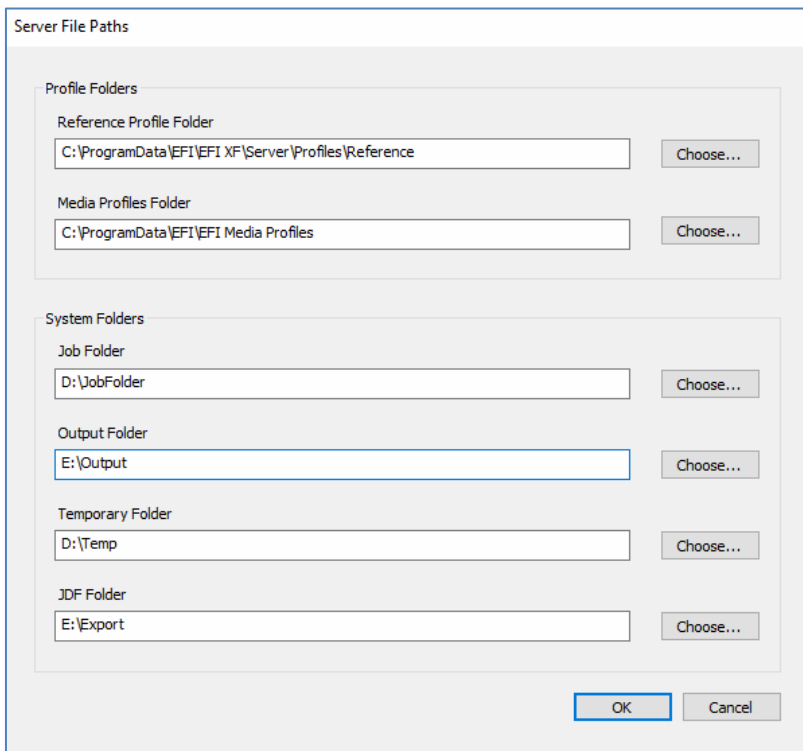

The screenshot shows the 'Server File Paths' dialog box. It is divided into two main sections: 'Profile Folders' and 'System Folders'. Each section contains several text input fields with 'Choose...' buttons next to them. The 'Profile Folders' section includes 'Reference Profile Folder' (C:\ProgramData\EFI\EFI XF\Server\Profiles\Reference) and 'Media Profiles Folder' (C:\ProgramData\EFI\EFI Media Profiles). The 'System Folders' section includes 'Job Folder' (D:\JobFolder), 'Output Folder' (E:\Output), 'Temporary Folder' (D:\Temp), and 'JDF Folder' (E:\Export). At the bottom of the dialog are 'OK' and 'Cancel' buttons.

Section	Field Name	Value	Action
Profile Folders	Reference Profile Folder	C:\ProgramData\EFI\EFI XF\Server\Profiles\Reference	Choose...
	Media Profiles Folder	C:\ProgramData\EFI\EFI Media Profiles	Choose...
System Folders	Job Folder	D:\JobFolder	Choose...
	Output Folder	E:\Output	Choose...
	Temporary Folder	D:\Temp	Choose...
	JDF Folder	E:\Export	Choose...

In both cases you can access the Output folder directly from the printer software.

## Print mode

Fiery XF comes with pre-configured print modes. Each print mode contains a unique combination of the following settings:

- Passes
- Double strike

## Recommended print modes

Please use Fiery Profile Service to download profiles for the ink type in your printer. They are a good starting point.


You can change the print mode in Server Manager on the Printer & Workflow Settings pane. The print mode is also saved as part of the media profile, so be aware that if you change the print mode on the Printer & Workflow Settings pane, it will affect the print quality of the media profile. For this reason, it is recommended that you select a media profile with the appropriate print mode settings or create a new media profile for your specific requirements.

## Print direction

You can change the print direction setting on the Media Configuration pane.

## Creating calibration files and media profiles

This section provides information on specific settings that are necessary when creating a calibration file in Color Tools. The calibration file defines the print conditions for the media profile. No special license is required to create a calibration file. The Color Profiler option license is required to create custom media profiles.

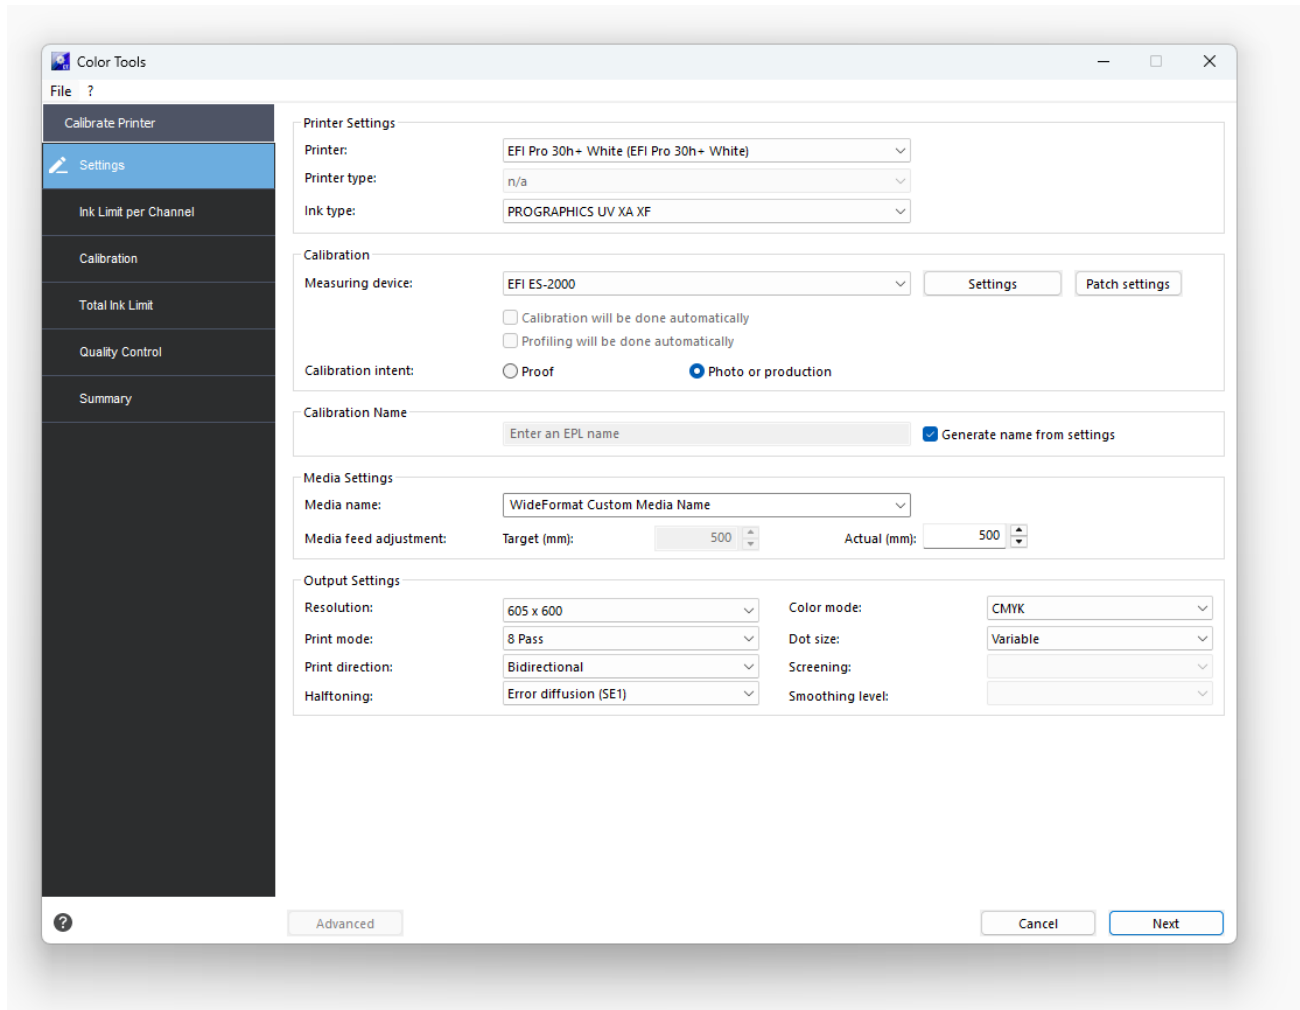

Select “Photo or production” as the calibration intent. Selecting “Proof” will limit the gamut of the printer.

The following resolutions and dot sizes (pl) are available:

Nom. res.	Exact res.	Ink %	Var.	Robust	Unlimited
300x600	302.38x600	31	5-15	10-15	5-15
450x600	453.57x600	47	5-15	10-15	5-15
600x600	604.76x600	63	5-15	10-15	5-15
900x600	907.14x600	94	5-15	10-15	5-15
600x1200	604.76x1200	126	5-15	10-15	5-15
900x1200	907.14x1200	189	5-10	10	5-15
1200x1200	1209.52x1200	252	5-10	10	5-15


When selecting a resolution and dot size, observe the following:

- Generally speaking, a fixed amount of ink per square inch is applied to all similar colors. In Color Tools, a resolution of 600 x 600 dpi requires by default 24 pl of ink to create the 100% ink limit. A percentage of less than 100 reduces the overall color gamut. For percentages above 100, Fiery XF automatically reduces the amount of color ink accordingly.
- The maximum dot size is 15 pl. The color gamut decreases below 900 x 600 dpi as the ink droplets do not completely fill the available space.
- You can adjust the amount of white ink separately. The 100% ink limit for 4-level color modes is 15 pl. This does not depend on the resolution.
- A variable dot size is the best choice for most applications.
- Fixed dot sizes (Normal, Fine, Superfine) are more robust and are recommended if mist or banding is an issue. However, be aware that fixed dot sizes can result in a grainier print.
- Normal (15 pl), Fine (10 pl) and Superfine (5 pl) dot sizes do not use Color Tool’s pre-calibration.
- Robust Variable dot size starts with a bigger dot size — 10 pl instead of 5 pl. Its performance lies in between that of variable and fixed dot sizes.
- Unlimited Variable applies full ink per pixel. With higher resolutions the ink amount increases up to 252%. Use this mode only in applications where you need that extra ink.
- For variable dot sizes, the table shows the effective dot range for color inks. Due to the stochastic nature of the halftoning, a small percentage of larger dots will be used at 100%, e.g. 15 pl at 600 x 1200 dpi.

## Printing with white ink

There is no specific calibration available. However, you can control the white channel by using a visual correction curve.

To print white ink, you must make the appropriate settings on the Printer & Workflow Settings for the printer.

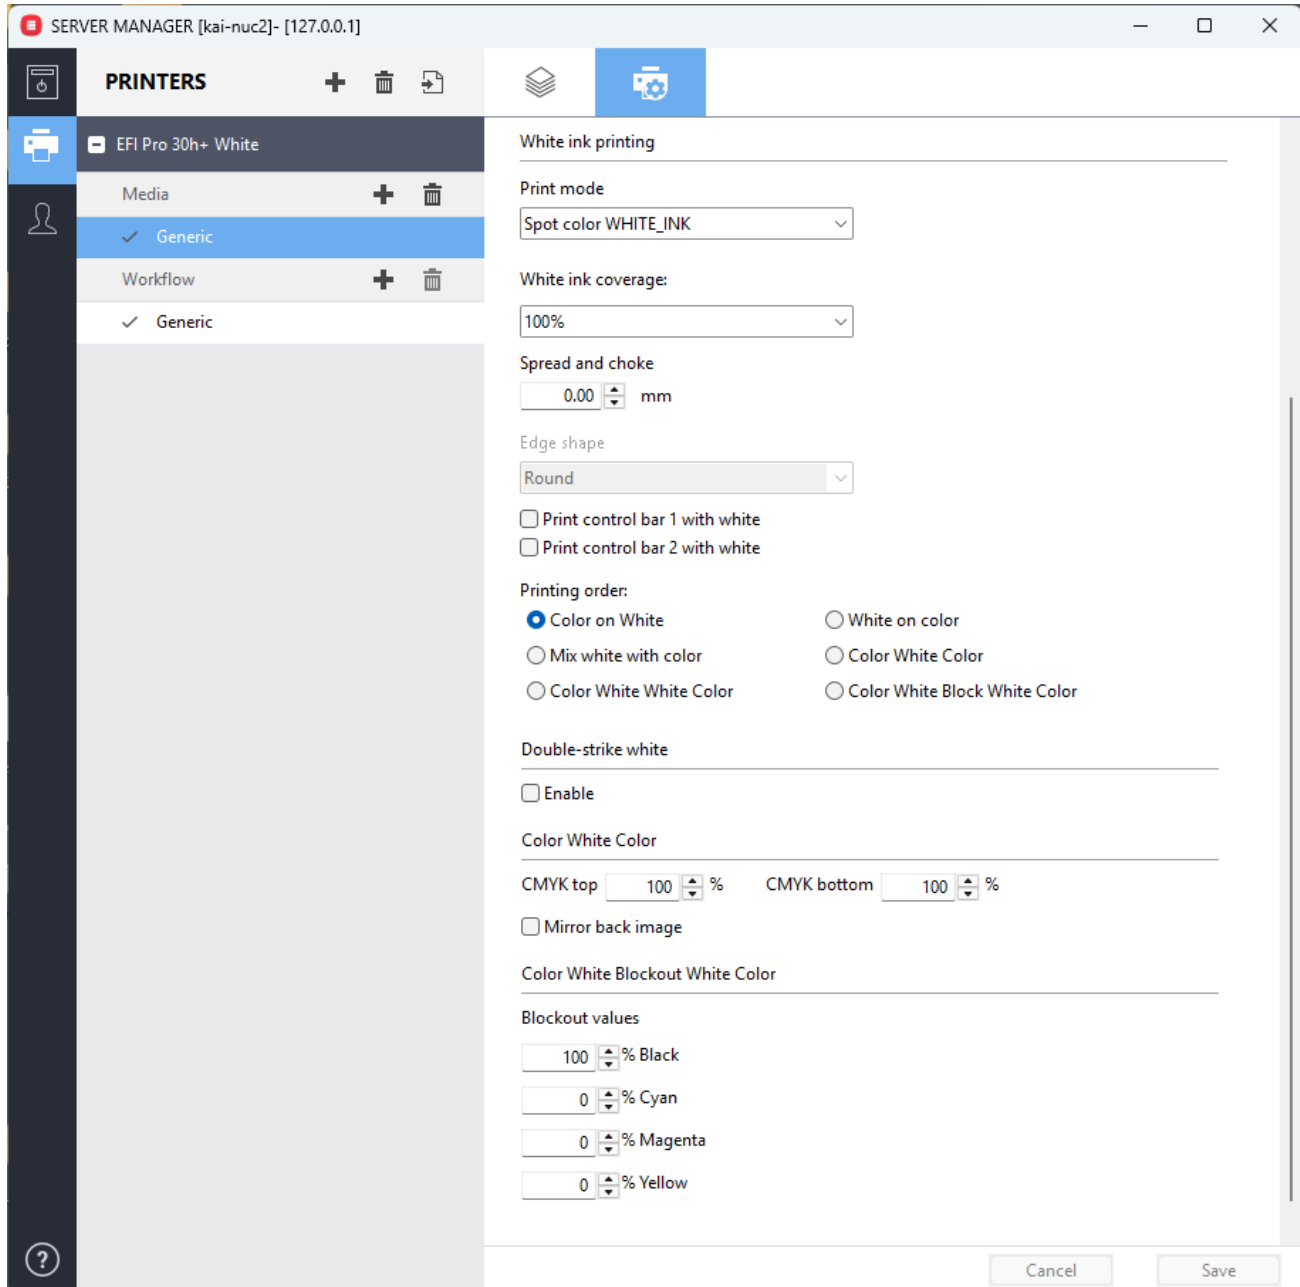

The settings are described below.

## Print mode

Select one of the following print modes:

Print mode	White channel
Spot color WHITE_INK	Prints: The spot color that is defined as WHITE_INK in the document. Any color separation from the job that is mapped to WHITE_INK and saved as a spot color table (*.cxf). The spot color table must be selected on the Spot Colors pane. The spot color WHITE_INK is output without color management in Fiery XF.
Fixed ink amount on printed areas*	A white ink dot is created for all pixel information that is not 0,0,0,0,0 (including the spot color WHITE_INK). You can exclude WHITE_INK from the print job on the Spot Colors pane.
Bounding box*	All image pixels are printed in white ink. This is the recommended setting for creating a calibration file.
White_INVERSE	A white ink dot is created for all pixel information that is 0,0,0,0. You can exclude WHITE_INK from the print job on the Spot Colors pane.
Ink chroma map	Additional white ink is applied to light areas. White ink is reduced in darker areas to save white ink.
Off	White is not printed, even if there is an appropriate color separation.

\* “Fixed ink amount on printed areas” and “Bounding box” are applied to separated and composite jobs.

For more information on defining spot colors in Fiery XF, see the Fiery XF online help.

## White ink coverage

You can control white ink coverage:


- In Fiery XF
- In Adobe Illustrator
- In Adobe Photoshop



## To adjust the white ink coverage in Fiery XF


1 Do one of the following:

- On the Printer & Workflow Settings pane for the printer, select the required percentage of white ink coverage. The selected white ink coverage percentage will be applied using the selected print mode.
- Create a visual correction file.
  - 1 Open Color Tools and click Visual correction.

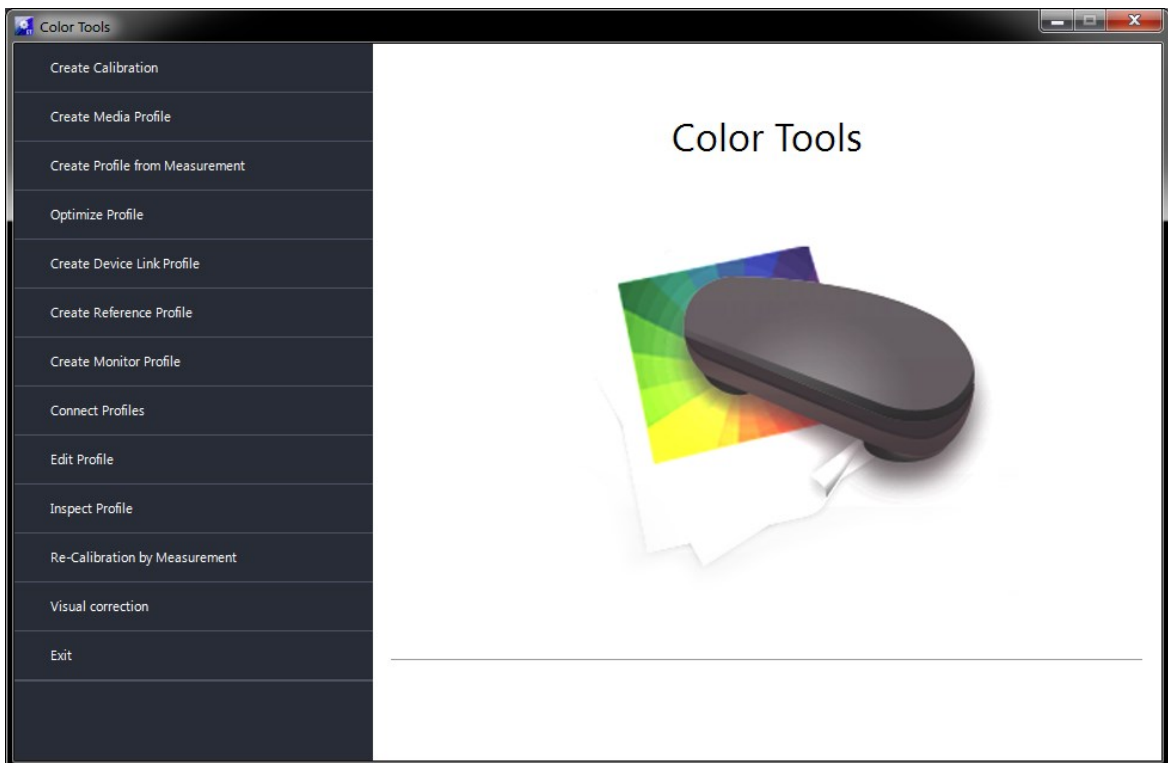




- 8 On the Media tab, open the Media Configuration pane. Under “Visual correction”, select the visual correction file.

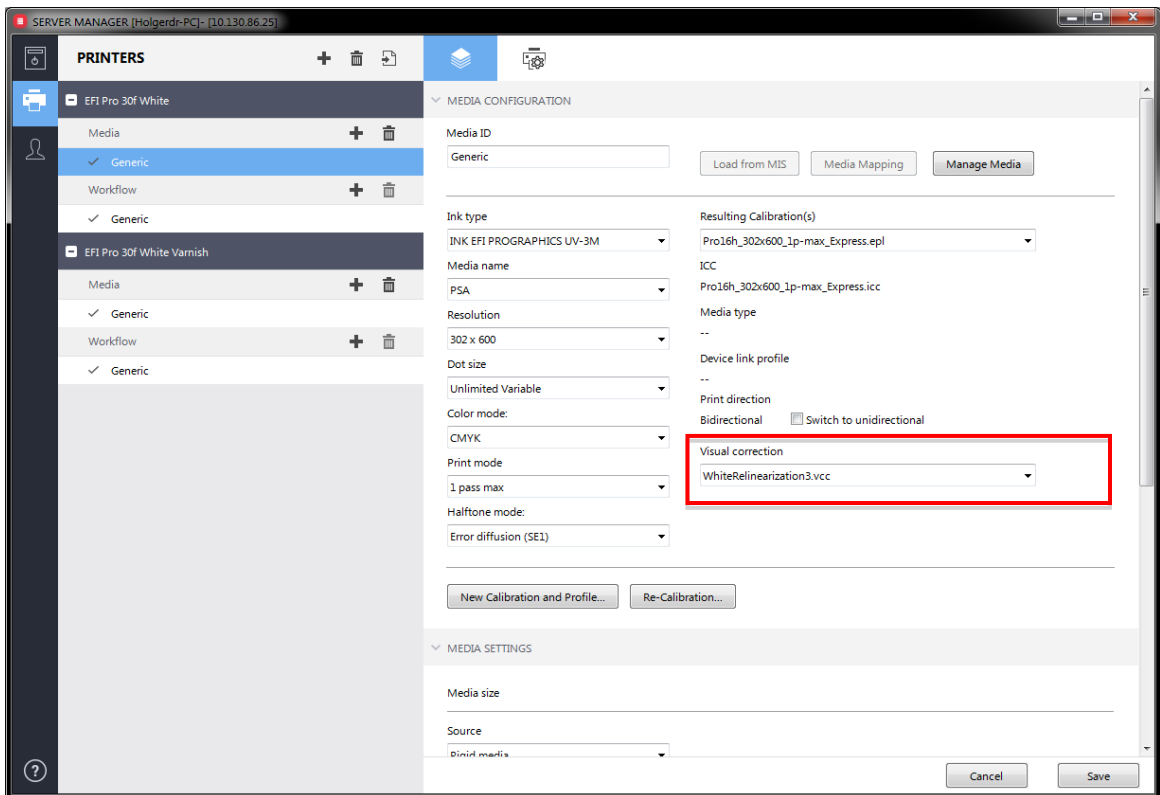

- 9 Click Save.
  - 10 Repeat for other media as desired.
- Note:** You can use the same curve with any printer.


### To adjust the white ink coverage in Adobe Illustrator

- 1 Open the file in Illustrator.
- 2 Select all areas of spot white.
- 3 Adjust the opacity as needed.

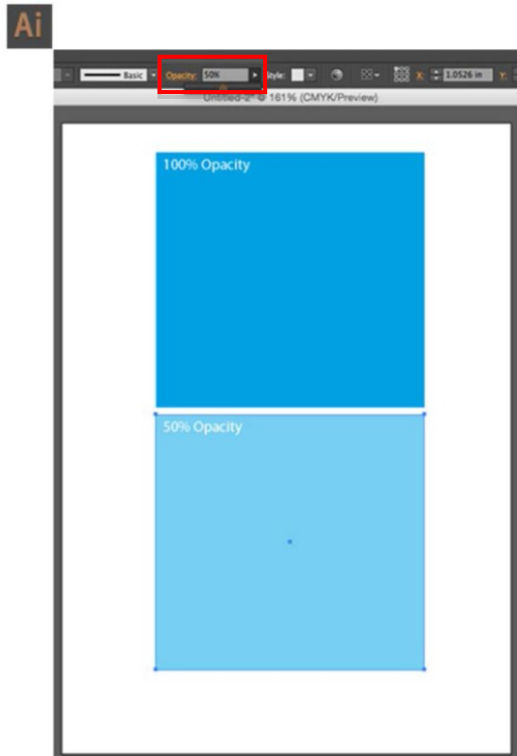

### To adjust the white ink coverage in Adobe Photoshop

- 1 Open the file in Photoshop.
- 2 Select all areas of spot white.
- 3 Adjust the opacity as needed.

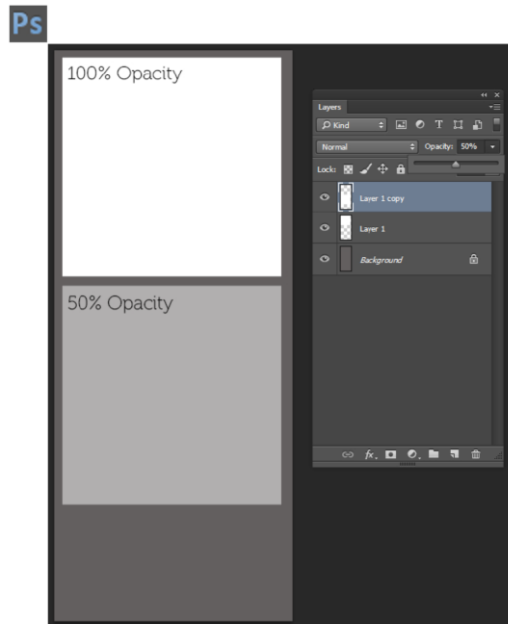

### Spread and choke

There is a stark contrast between white and color inks. Even the smallest of registration errors can be visible. A small negative value (choke) reduces the size of white just enough to remove visible white edges. Often a correction of -0.04 mm (1 pixel at 600 dpi) can help. A positive value adds a uniform white border around images.

## Print order

Due to the opaque properties of white ink, the print order is important. The settings are applied as follows:

Print order	Job has white ink	Effective print order	Description
Color on white	No	CYMK only	Prints white as the foundation layer, and then prints color on top. Use this setting for printing on dark or metallic materials.
	Yes	Color on white	
White on color	No	CMYK only	Prints white on top of color. Use this setting for printing backlit transparencies.
	Yes	White on color	
Mix white with color			Use this setting to print white only, but at the fastest possible speed. This setting is applied irrespective of the selected print mode.
Color White Color			Prints white ink as the middle of three layers. In daylight conditions, the top and white layers operate in reflective mode. In the dark, the backlight shines through all three layers. You can adjust the percentage of ink for the top and bottom layers separately. By default, 100% of ink is applied to the top and bottom layers. It is not possible to have a different image on the top and bottom. It is possible to mirror the back layer for window-cling applications. This setting is applied irrespective of the selected print mode.
Color White White Color			Color White Color – plus double-strike white for higher opacity. This setting is applied irrespective of the selected print mode.
Color White Block White Color			Color White White Color – plus additional Blockout layer in the middle for maximum opacity. The image of the Blockout layer is the same as the image in the white layers. The CMYK ink amount for the Blockout layer image can be set with the four controls in the group Color White Blockout White Color. This setting is applied irrespective of the selected print mode.


## Color White Color

The spin controls adjust the top and bottom ink amounts for print orders with two color layers:

- Color White Color
- Color White White Color
- Color White Block White Color

## Mirror back image

For print orders with two color layers, the back image can be mirrored. White and Blockout contents are the superset of original and mirrored separation image. In this example of separations, the white layer is WHITE\_INK

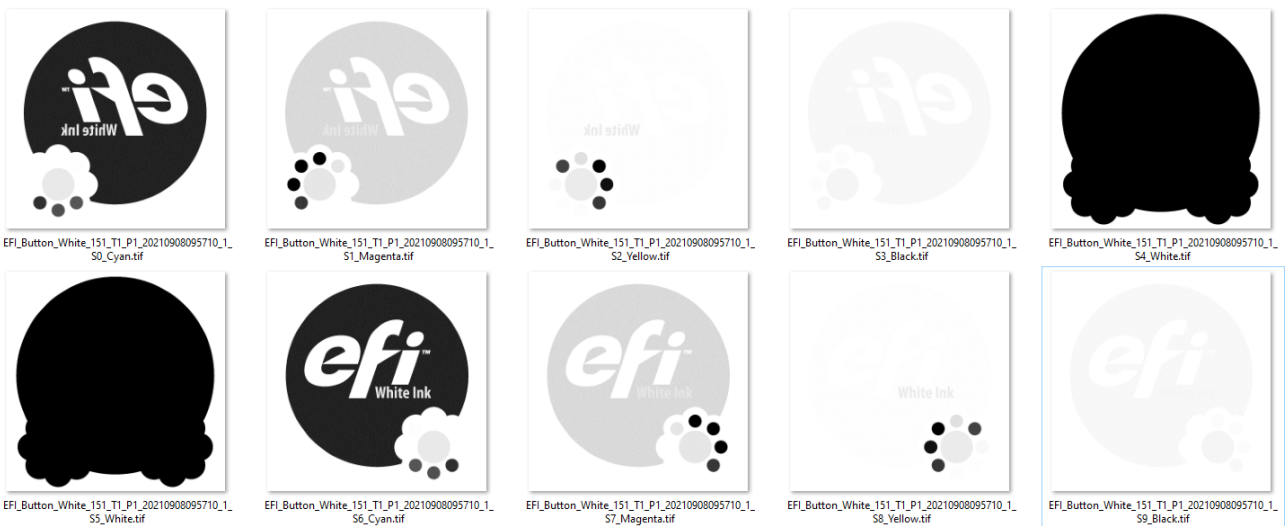


in the document.

## Color White Blockout White Color

The spin controls set the color values of the Blockout layer.

## The White Varnish driver (Printing with Clear ink)


Create in Server Manager a new printer for the White Varnish version of the Pro 30h+ printer:

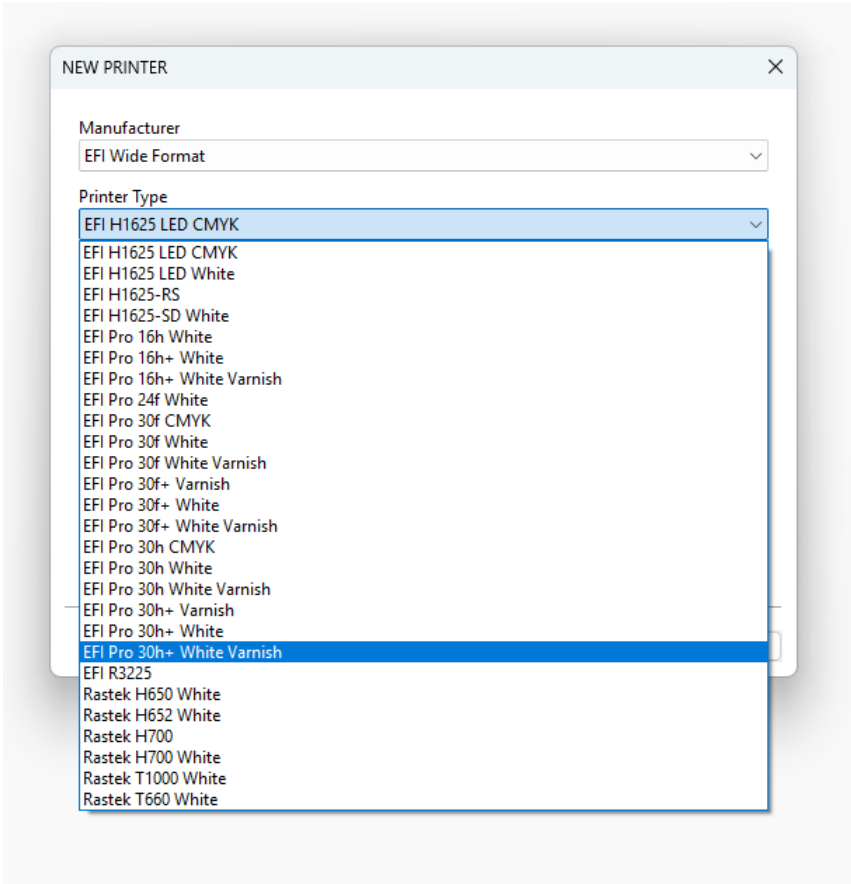

Always match the driver to the printer. The printer does not reject BCO files from the other driver and the behavior in such a case will not match the expectation:

	White driver	White Varnish driver
White printer	Correct	Clear printed as half intensity White
White Varnish printer	White printed as a mix of half intensity White and Clear	Correct



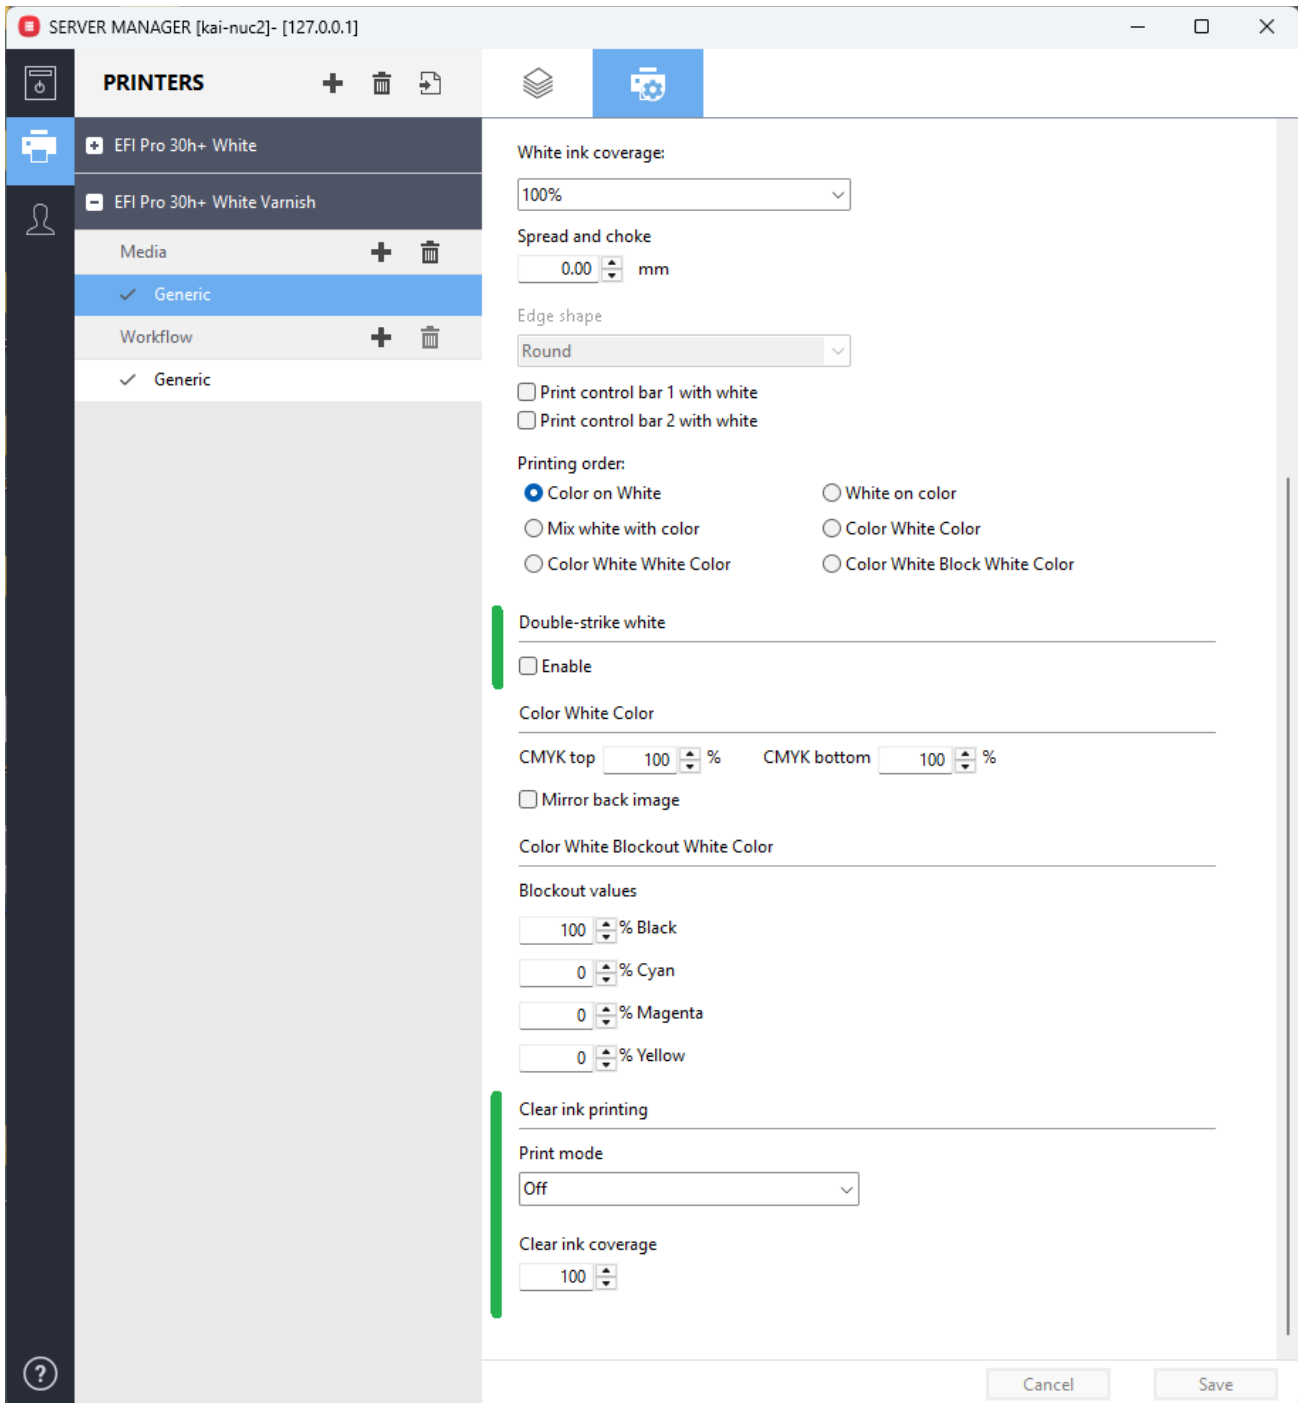

## Double-strike white

The White Varnish configuration of the printer does not have additional heads for Varnish. With the same settings the intensity of White is roughly 50% compared to the White configuration.

Double-strike white gives that extra amount of white at the expense of print speed if enabled.

## Clear ink printing

To print Clear ink, you must make the appropriate settings on the Printer & Workflow Settings pane for the printer.

### Print mode


The options are like the options for White.

### Clear ink coverage

You can control clear ink coverage in Fiery XF using the related printer settings in Server Manager.


## The Varnish driver (Printing with Clear ink)

Create in Server Manager a new printer for the Varnish version of the Pro 30h+ printer:

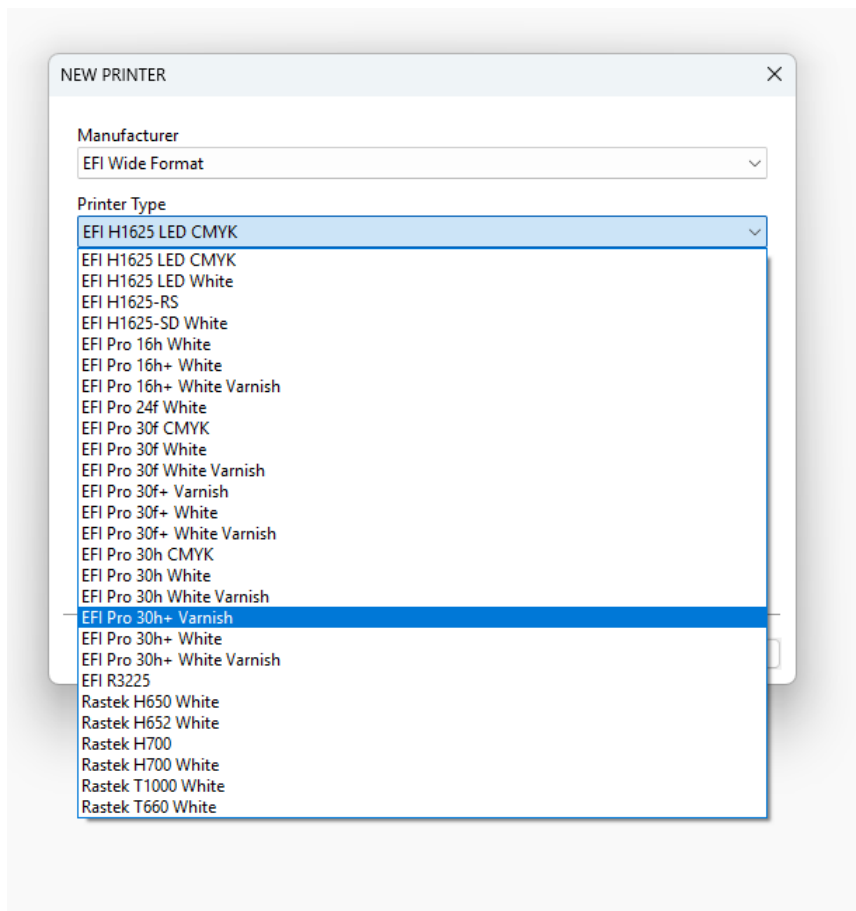

This driver supports only Clear ink.

Always match the driver to the printer. The printer does not reject BCO files from the other driver and the behavior in such a case will not match the expectation.

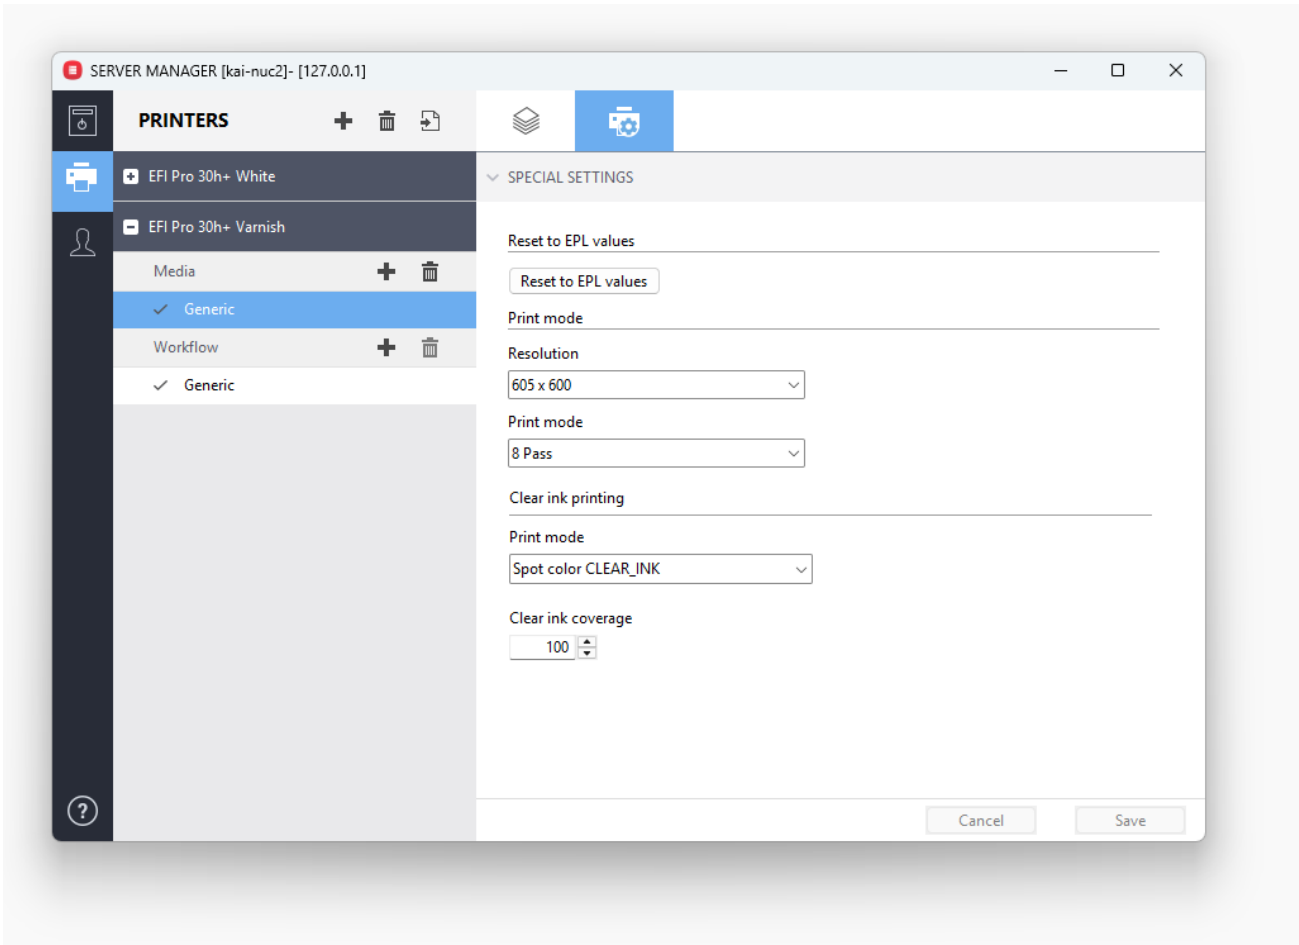

## Clear ink printing

To print Clear ink, you must make the appropriate settings on the Printer & Workflow Settings pane for the printer.

### Print mode

The options are like the options for White.

### Clear ink coverage

You can control clear ink coverage in Fiery XF using the related printer settings in Server Manager.

## Special features


### Skip blank space during printing

The Skip Blank Space feature enables the Pro 30h+ printer to advance media quickly through blank spaces in an image or in a group of nested or step-and-repeat images to provide faster printing. Because the printer has white ink, we prefer the term Blank Space instead of White Space in order to avoid confusion.

In order for the Skip Blank Space feature to work, the printed files must have bands of raster lines with the following properties:

- Each raster line is entirely blank. No single pixel of ink in the output raster data. White areas of the source images meet this condition. If there is some subtle texture, it is not white.
- Paper white (e.g. render intent absolute colorimetric) is OFF. Such areas would be inked, not blank.
- White or clear ink generation is off or only on areas which already have color ink. E.g. Bounding Box would make all raster lines non-blank.
- A blank area in the middle of the job (Middle Skip) must have a minimum height. Below the minimum height the area will not be skipped.


This example shows a simplified job with two big text lines:

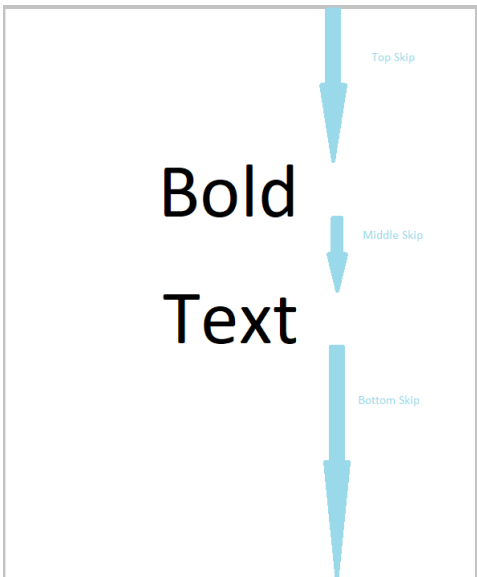

You must enable the feature on the printer software as well. Only then the optimization is done.

## Media and ink consumption

The Fiery XF printer driver supports bidirectional communication with Management Information Systems (print MIS systems). Even if the system is not connected to a print MIS system, you can still view estimated media and ink consumption values calculated by Fiery XF:

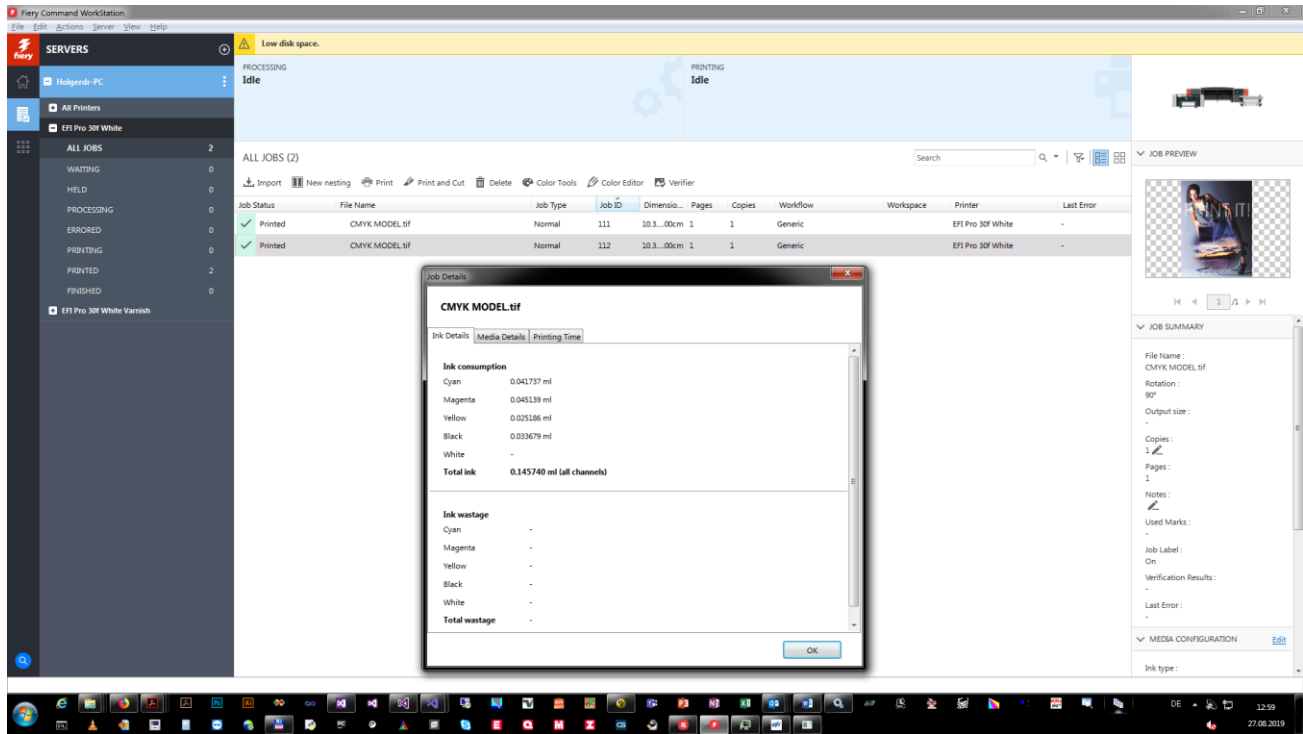

### To view media and ink consumption for the current job

- 1 In the job list of Command WorkStation, right-click the job and then click Job Details. The information is cumulative (adding from print to print).
- 2 Import the \*.bco file in the print application. The ink amounts are shown there as well.

### Source of the accounting information

- The Fiery XF driver writes an empty CSV file with the same name as the BCO file.
- The print application appends accounting information to this CSV file after each print run.
- Once a minute, the Fiery XF driver updates the job information according to any CSV updates.